

ENC Series

Wheel type INCREMENTAL Rotary encoder

■ Features

- Suitable for measuring the length or speed of target by wheel type
- The output waveform is proportional to the unit of international measurement type
- Power supply : 5VDC, 12–24VDC ±5%



■ Application

- Packing machine, Sheet manufacturing, Textile machinery and General industrial plants.

⚠ Please read "Caution for your safety" in operation manual before using.



■ Ordering information

ENC	-	1	-	1	-	1	-	24	-	2C
Series	Output phase	Min. measuring unit	Output	Power supply	Cable					
Wheel type	1 : A, B phase	1 : 1mm 2 : 1cm 3 : 1m 4 : 0.01yd 5 : 0.1yd 6 : 1yd	1 : Totem pole output 2 : NPN open collector output 3 : Voltage output	5 : 5VDC ±5% 24 : 12–24VDC ±5%	No mark: Normal type (*) 2C: Cable outgoing connector type					

* Cable length: 200mm

■ Specifications


Item	Wheel type Incremental Rotary encoder		
Resolution (P/R)	See resolution (Page M-30)		
Electrical specification	Output phase	A, B phase	
	Phase difference of output	Output between A and B phase : $\frac{T}{4} \pm \frac{T}{8}$ (T=1 cycle of A phase)	
	Control output	Totem pole output	• Low ⇨ Load current : Max. 30mA, Residual voltage : Max. 0.4VDC • High ⇨ Load current : Max. 10mA, Output voltage : Min. (Power voltage-1.5)VDC
		NPN open collector output	Load current : Max. 30mA, Residual voltage : Max. 0.4VDC
		Voltage output	Load current : Max. 10mA, Residual voltage : Max. 0.4VDC
	Response time (Rise/Fall)	Totem pole output	Max. 1μs
		NPN open collector output	Max. 1μs
		Voltage output	Max. 1μs
	Max. Response frequency	180kHz	
	Power supply	5VDC ±5% (Ripple P-P: Max. 5%), 12–24VDC ±5% (Ripple P-P: Max. 5%)	
	Current consumption	Max. 60mA (disconnection of the load)	
	Insulation resistance	Min. 100MΩ (at 500VDC)	
	Dielectric strength	750VAC 50/60Hz for 1 minute (Between all terminals and case)	
Connection	Cable outgoing type, 200mm cable outgoing connector type		
Mechanical specification	Starting torque	Dependant on coefficient of friction	
	Max. allowable revolution	(★Note1) 5000rpm	
Vibration	1.5mm amplitude at frequency of 10 ~ 55Hz in each of X, Y, Z directions for 2 hours		
Shock	Max. 75G		
Ambient temperature	-10 ~ 70°C (at non-freezing status), Storage: -25 ~ 85°C		
Ambient humidity	35~85%RH, Storage: 35~90%RH		
Cable	5P, φ 5mm, Length: 2m, Shield cable		
Protection	IP50 (IEC specification)		
Weight	Approx. 494g		
Approval	CE		

※ (★Note1) Max. allowable revolution ≥ Max. response revolution 【Max. response revolution (rpm) = $\frac{\text{Max. response frequency}}{\text{Resolution}} \times 60 \text{ sec}$ 】

Please select the resolution to make lower max. revolution than max. allowable revolution.

Wheel Measuring Type


Control output diagram

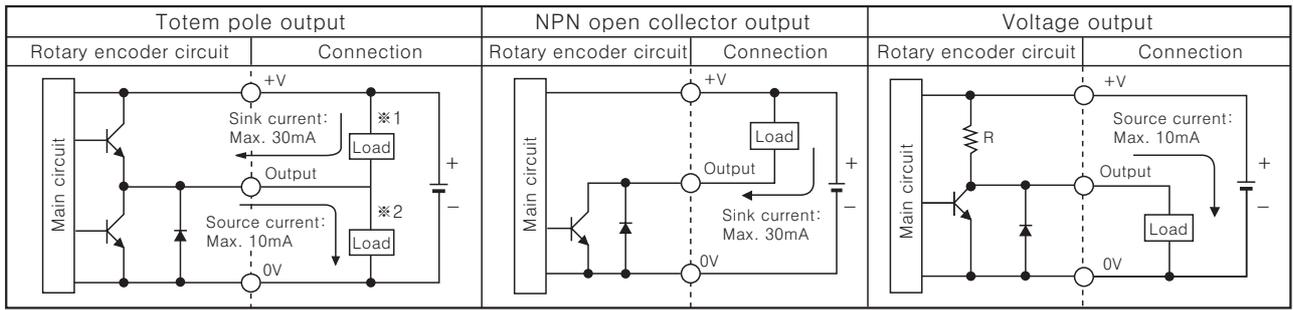

- The output circuit of A, B phase are the same.
- Totem pole output can be used for NPN open collector type(*1) or voltage output type(*2).

Output waveform

- Totem pole output / NPN open collector output / Voltage output

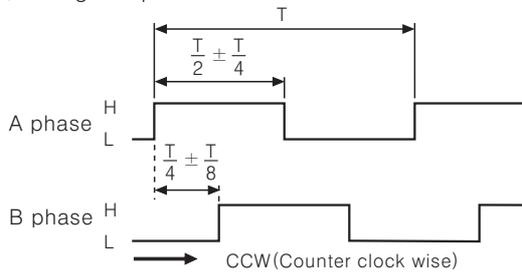


※CCW: Same rotating direction as connection F.G

Resolution

No	Min. measuring unit	Moving distance per 1pulse	Gear duty	Wheel circumference	SLIT(P/R)
1	1mm	1mm/P	2 : 1	250mm	500Pulse
2	1cm	1cm/P	4 : 1	250mm	100Pulse
3	1m	1m/P	4 : 1	250mm	1Pulse
4	0.01yd	0.01yd/P	4 : 1	228.6mm (0.25/yd)	100Pulse
5	0.1yd	0.1yd/P	4 : 1	228.6mm (0.25/yd)	10Pulse
6	1yd	1yd/P	4 : 1	228.6mm (0.25/yd)	1Pulse


Connections

Connector type

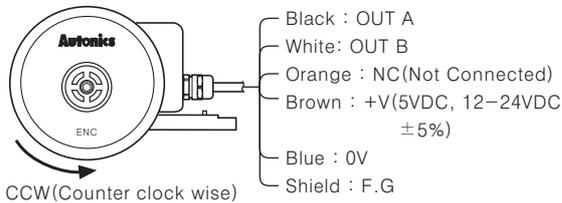

- ※Unused wires must be insulated.
- ※The shield wire and metal case of encoder must be grounded(F.G)

Cable outgoing connector type




Pin No.	Cable color	Totem pole output NPN open collector output Voltage output
①	Black	OUT A
②	Red	N.C
③	Brown	+V
④	Blue	GND
⑤	White	OUT B
⑥	Gray	N.C
⑦	Orange	OUT Z
⑧	Yellow	N.C
⑨	Shield	F.G
⑩	Purple	N.C

- ※N.C(Not Connected)
- ※F.G(Field Ground)


Dimensions

Unit:mm

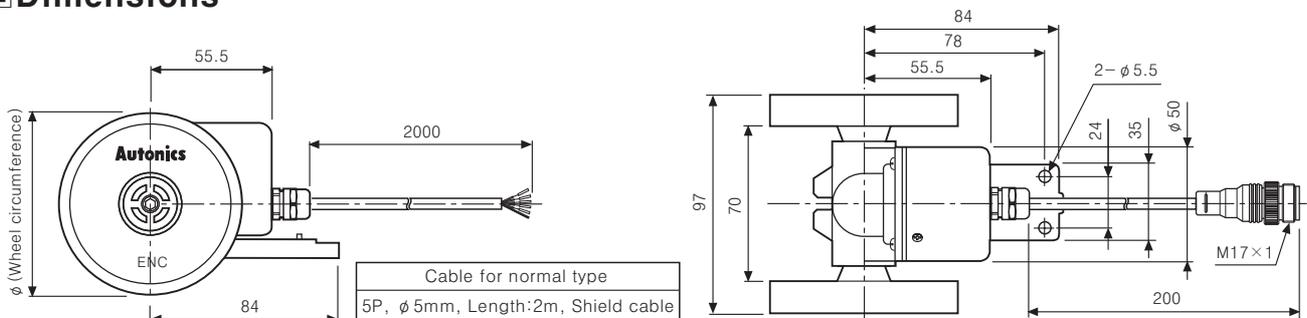

- ※The wheel of revolution is changed according to circumference(φ), please see resolution chart.

- Connector cable(Accessory)

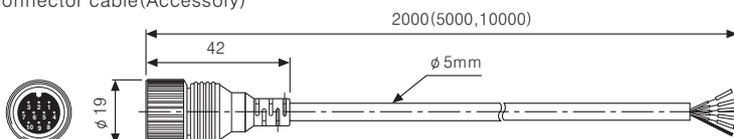

Connector cable model
EC5-2(Standard),
EC5-5, EC5-10

Connector cable model
EC 5 - 2
└ Cable length(m)
└ The number of cables
└ Connector cable of Encoder

※A cable length is optional.

(A) Counter

(B) Timer

(C) Temp. controller

(D) Power controller

(E) Panel meter

(F) Tacho/ Speed/ Pulse meter

(G) Display unit

(H) Sensor controller

(I) Proximity sensor

(J) Photo electric sensor

(K) Pressure sensor

(L) Rotary encoder

(M) 5-Phase stepping motor & Driver & Controller